

Hand Control JCH35A19



Data sheet

Hand Control JCH35A19

- JCH35A19 is an economical model. Brand-new matching colors and shape bring new visual impact. Ergonomic design offers excellent experiences for the users.




Feature

- IP Grade: IPX4
- Number of button: Maximum 8 buttons
- Tactile switch to ensure long service life
- Drive up to 4 actuators simultaneously
- Color: Gray/Black
- Supporting control box: All standard control boxes of JIECANG
- Can be operated by either hand
- Panel and color design can be customized according to specific requirements

Usage

- Operating temperature: +5°C to +40°C
- Reserve Temperature: -10°C to +50°C
- Relative humidity: 20% to 80% (non-condensing)
- Atmospheric pressure: 860 to 1060 hPa
- Altitude: up to 2000m
- Approvals: RoHS

Dimension drawing

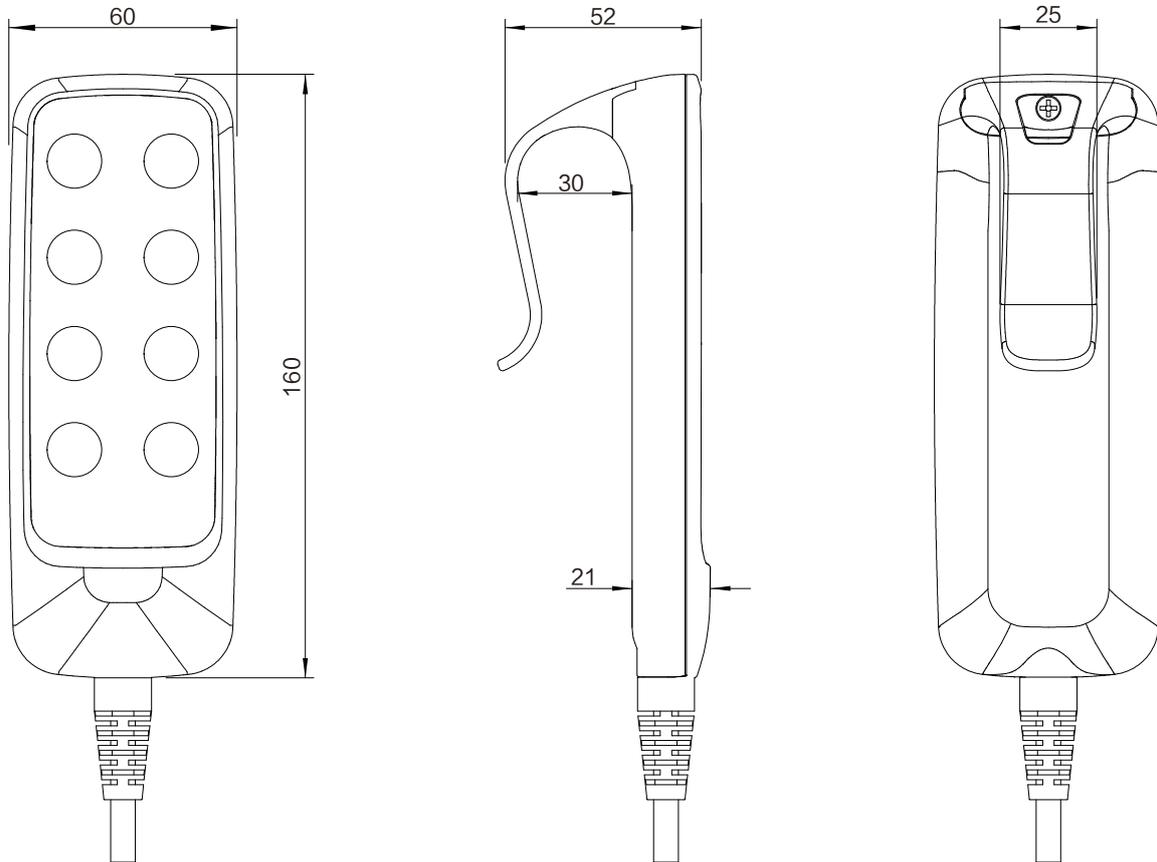


Ordering Key

Model	JCH35A19	JCH35A19=A series handset
Backlight	X	A= with backlight B=without backlight
Button row number	X	1~4
Color	X	G=Gray B=Black
Panel code	XXX	4G1=JCH35A19-4G1 (See JCH35A19 standard panel)
Plug and Cable	XXX	8L1=8pin DIN plug of spring cable 13L1=13L1=13pin DIN plug of spring cable 10P1=10pin crystal elbow flex plug of spring cable
Cable length	XXX	3D0=3m
Linkage way	X	0=single action L=linkage action

Naming regulation

JCH35A19 - B - 4 - G - 4G1 - 8L1 - 3D0 - L

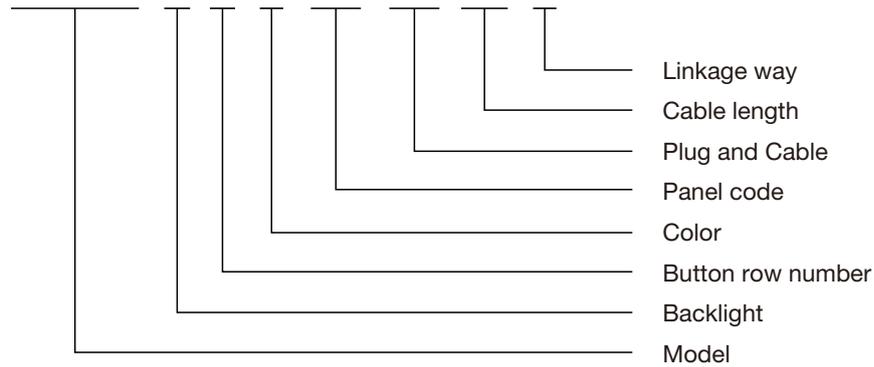


JCH35A19 standard panel

Please check if the function you need is matching with the panel function before placing an order.




JCH35A19-1G2

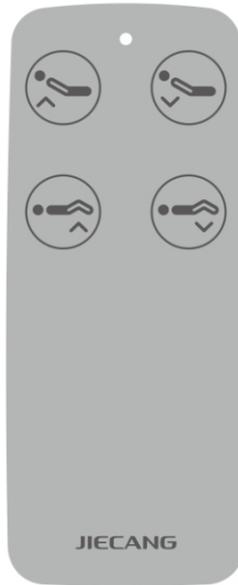


JCH35A19-2G2



JCH35A19-3G3

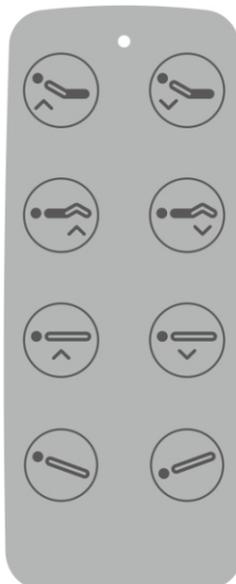

JCH35A19-4G5

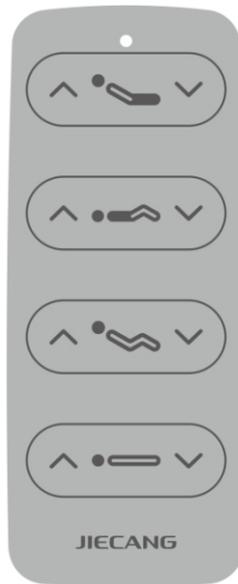


JCH35A19-4G4




JCH35A19-1B1



JCH35A19-2B1

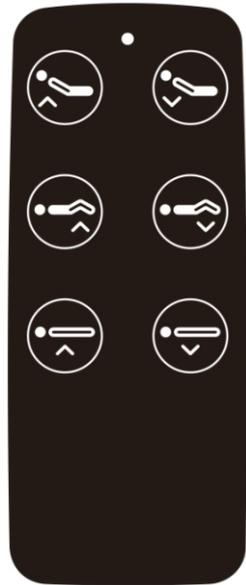


JCH35A19-3B2

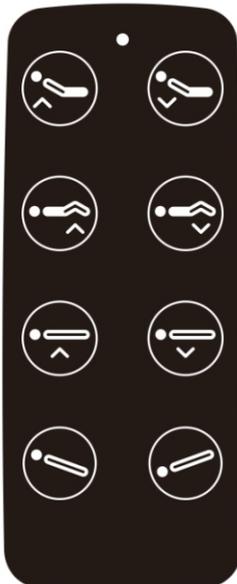


JCH35A19-4B1

Plug


8pin DIN plug: straight cable 8D1; spring cable: 8L1(matching with JIECANG control boxes of DIN plug)

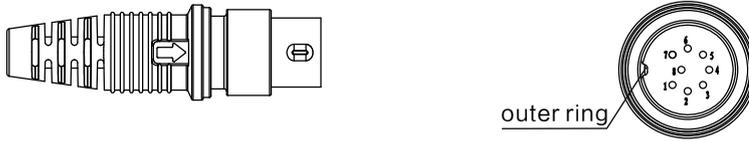

13pin DIN plug: straight cable 13D1; spring cable: 13L1(matching with JIECANG control boxes of DIN plug)

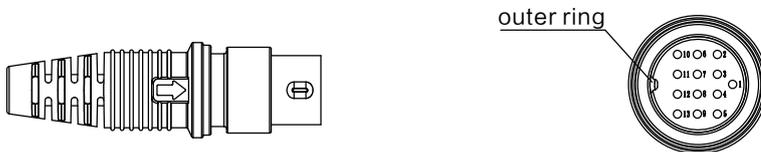

10pin crystal elbow flex plug: straight cable:10H1; Spring cable: 10P1 (matching with JIECANG control boxes JCB35T2, JCB35T3, JCB35T6 of flex plug)

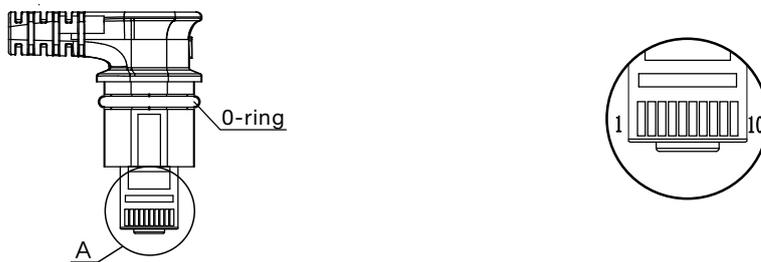

Attention: The model of supporting control box and the plug will be different according to the number of supporting actuators, Please contact the salesman in the corresponding area of JIECANG for confirmation before placing an order.

Disclaimer and Exclusion of Liability

The user must determine the suitability of JIECANG products under specific conditions. JIECANG is committed to providing the latest product information. However, as JIECANG's product are constantly improving, it is possible to make changes to JIECANG's product without prior notice. Therefore, JIECANG cannot guarantee the correctness and authenticity of the product information. Although JIECANG will do its best to meet the order requirements, due to the above reasons, JIECANG cannot guarantee the delivery capacity of any specific product.

Therefore, JIECANG reserves the right to stop selling any products listed on the website or product catalog or other JIECANG written materials. All sales activities must be carried out in accordance with the requirements of JIECANG sales and Delivery Standard Clauses. For copies of relevant documents, please contact JIECANG.